


LOCATION OF WELLS WITH LITHOLOGIC, WATER-QUALITY, AND GEOHYDROLOGIC-CHARACTERISTIC INFORMATION IN THE STUDY AREA

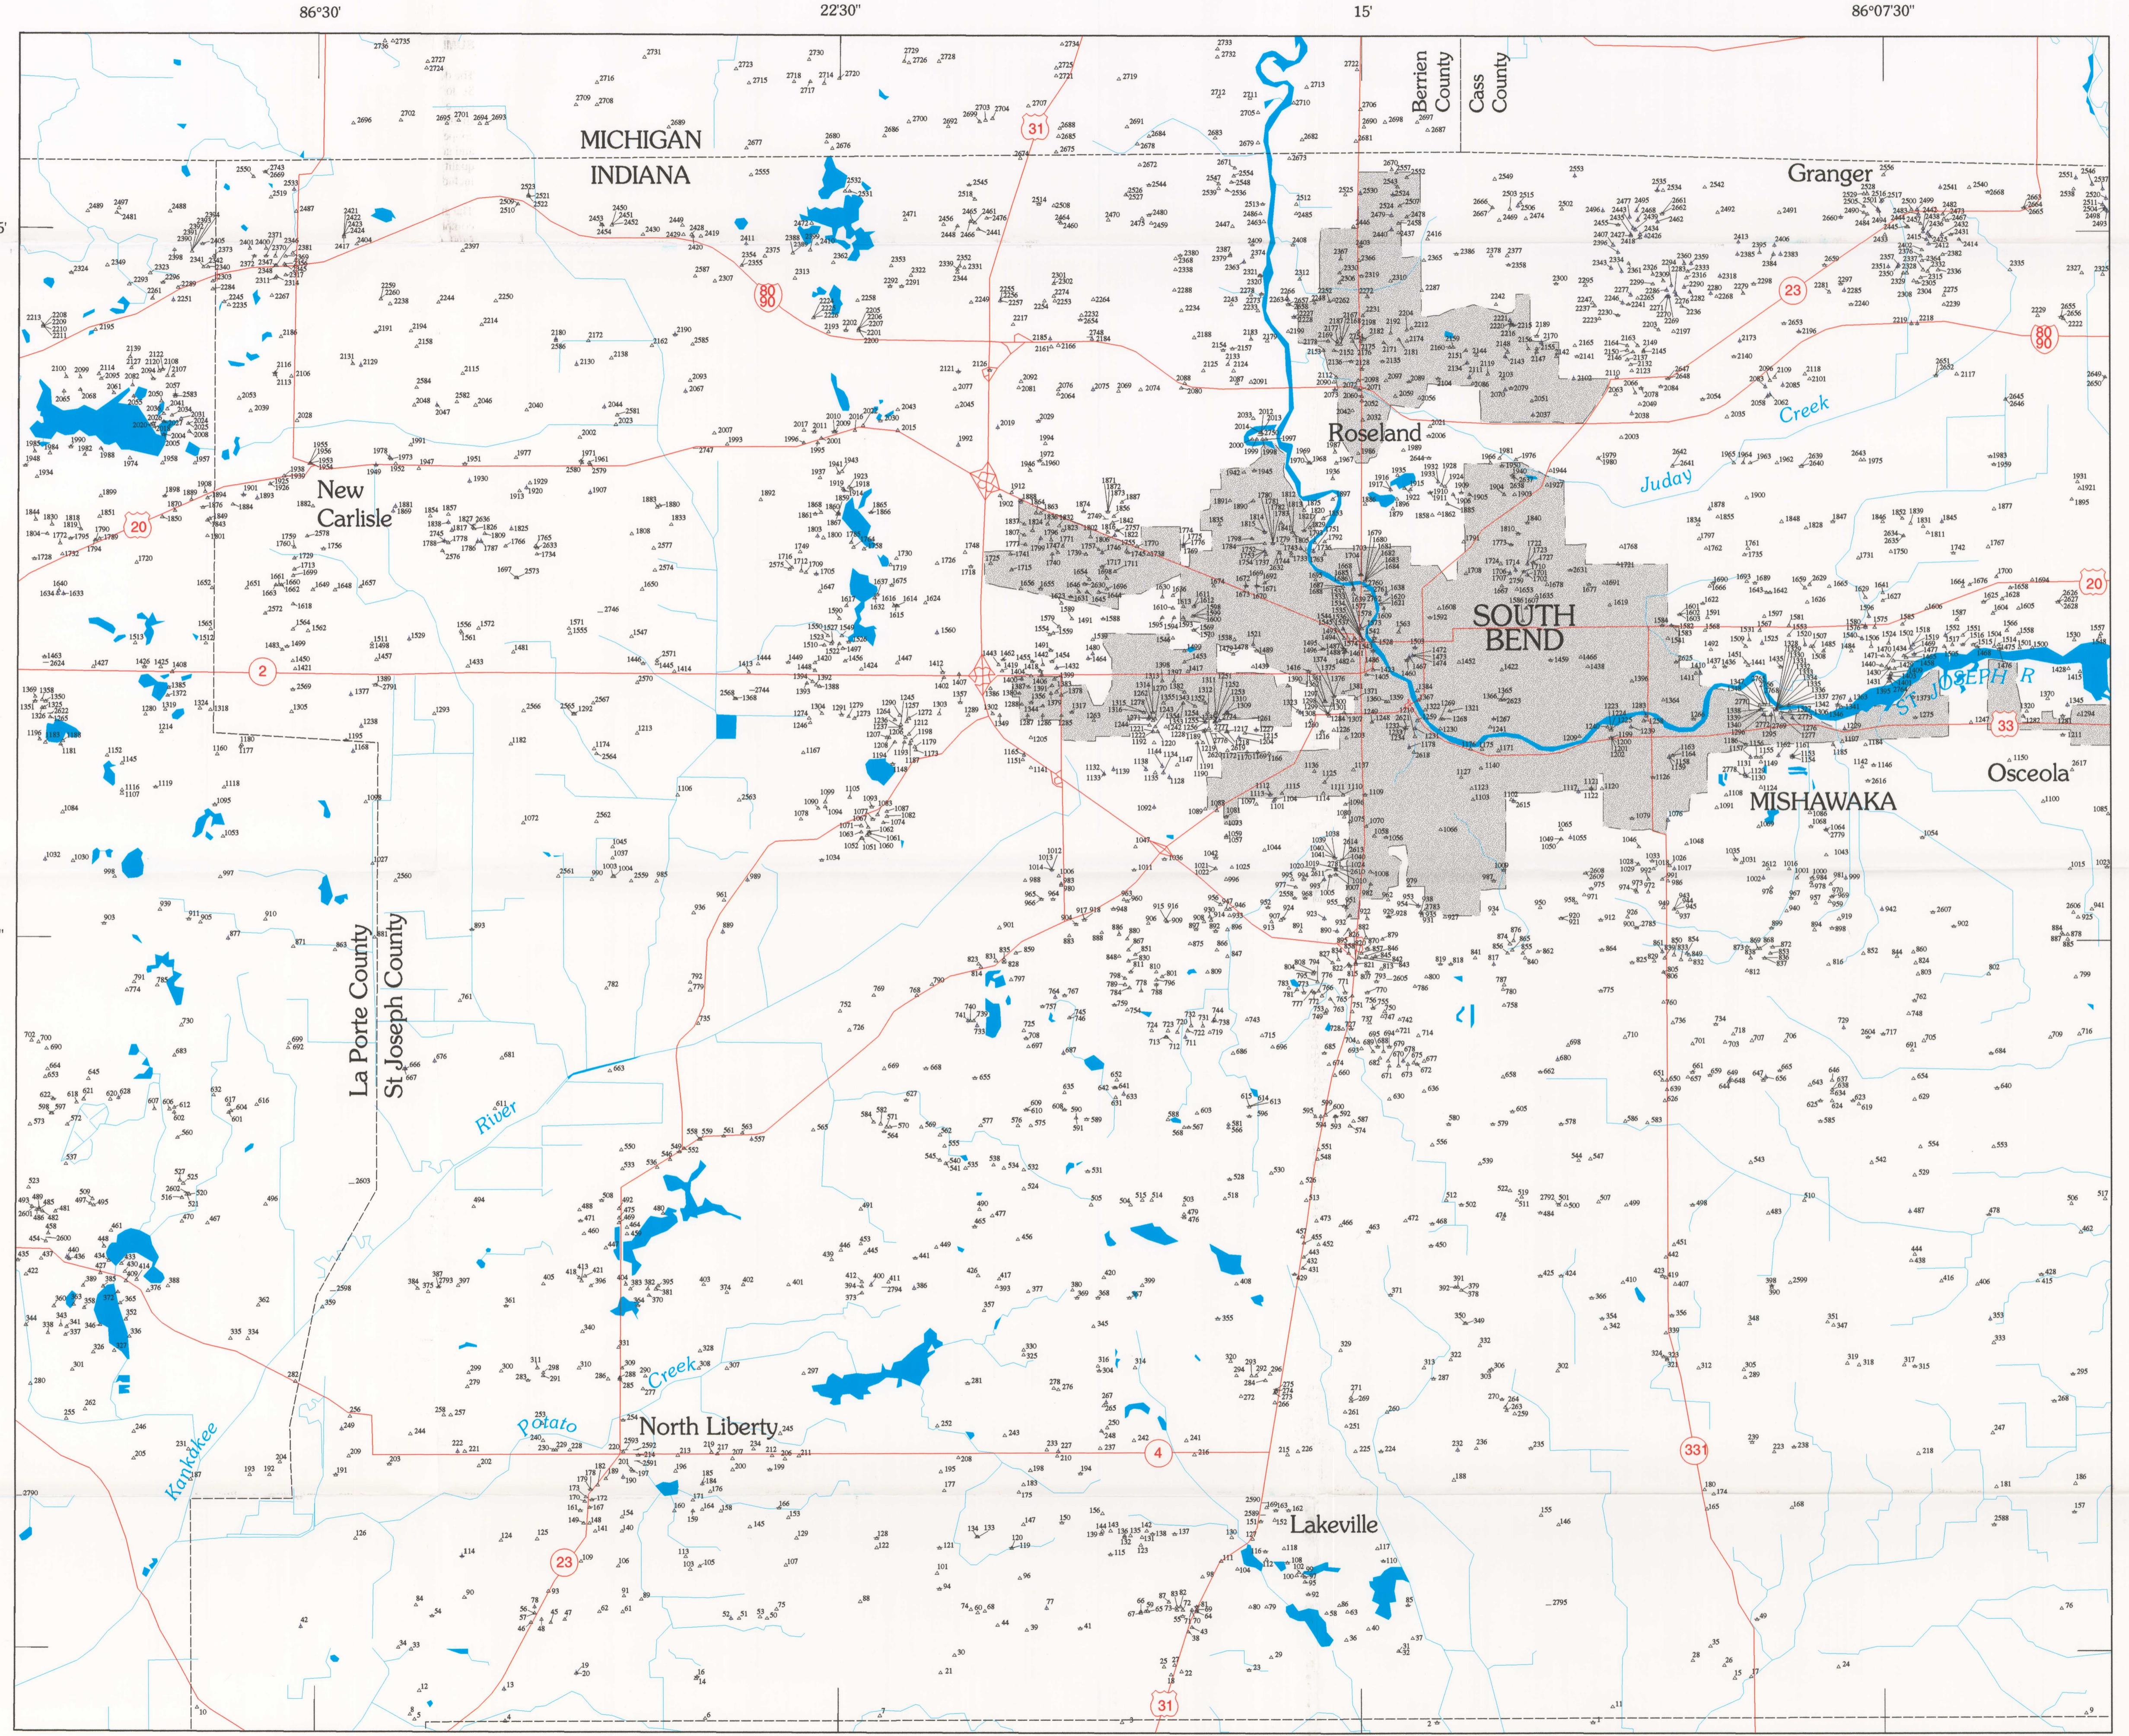

SUMMARY AND CONCLUSIONS

The domestic and municipal water supply for the City of South Bend and for St. Joseph County, Indiana, is withdrawn primarily from thick layers of sand and gravel in the unconsolidated glacial deposits. These permeable layers can be shallow and susceptible to contamination. The U.S. Geological Survey, in cooperation with the South Bend Water Works, compiled lithologic, water-quality, and geohydrologic information in a map format to assess the availability and quality of ground water in and around the South Bend area. The study area includes all of St. Joseph County and the eastern part of La Porte County.

The ground-water-flow system in St. Joseph County and eastern La Porte County comprises two major aquifers (upper and lower). Both aquifers contain layers of sand, mixed sand and gravel, and gravel. The upper aquifer ranges in thickness from 0 to 150 feet (ft); the lower aquifer ranges from less than 10 ft to 180 ft thick. The aquifers can be separated vertically by a confining unit of clay-rich till; thickness of the confining unit ranges from 0 to about 90 ft.

Areas of high horizontal hydraulic conductivity and transmissivity occur across the study area. Conductivities average 27 feet per day (ft/d) in the upper aquifer and 220 ft/d in the lower aquifer. The average transmissivity of the upper aquifer is 1,200 feet squared per day (ft²/day); the average transmissivity of the lower aquifer is 6,600 ft²/day. The lower aquifer has higher conductivities and transmissivities, on the average, than does the upper aquifer. The estimated recharge rates for four areas within the study area, calculated by use of stream base-flow separation, range from 7.36 to 12.5 inches per year.

Ground water is generally hard to very hard, near neutral to slightly alkaline (pH greater than 7.0), with median dissolved solid concentrations of 361 milligrams per liter (mg/L) in the upper aquifer and 430 mg/L in the lower aquifer. Concentrations of three constituents—dissolved solids, manganese, and iron—exceeded U.S. Environmental Protection Agency Secondary Maximum Contaminant Levels in samples from some wells. Concentrations of nitrate in two samples from the upper aquifer exceeded the Maximum Contaminant Level of 10 mg/L as N.

The maps indicate numerous areas around South Bend with adequate aquifer thickness and corresponding transmissivities to support development of additional ground-water resources for municipal use. The upper aquifer is thickest in the northeastern and southwestern parts of the study area, with areas of varying thickness to the west. The lower aquifer is thickest to the west, south, and north of South Bend. Numerous known contamination sites are in St. Joseph County; thus, the selection of new municipal well fields depends on the location of these sites relative to any new well fields and the corresponding ground-water-flow direction.

REFERENCES

- Bayless E.R., and Arihood L.D., 1996, Hydrogeology and simulated ground-water flow through the unconsolidated aquifers of northeastern St. Joseph County, Indiana: U.S. Geological Survey Water-Resources Investigations Report 95-4225, 47 p.
- Beatty, J.E., 1990, Water resource availability in the Kankakee River Basin, Indiana: Indiana Department of Natural Resources, Division of Water, Water Resource Assessment 90-3, 247 p.
- Butler, S.S., 1957, Engineering hydrology: Englewood Cliffs, N.J., Prentice-Hall, Inc., 356 p.
- Clendenon, C.J., and Beatty, J.E., eds., 1987, Water resource availability in the St. Joseph River Basin, Indiana: Indiana Department of Natural Resources, Division of Water, Water Resource Assessment 87-1, 139 p.
- Fenelon, J.M., Bobay, K.E., and others, 1992, Hydrogeologic atlas of aquifers in Indiana: U.S. Geological Survey Water-Resources Investigations Report 92-4142, 197 p.
- Fenelon, J.M., Bayless, E.R., and Watson, L.R., 1995, Ground-water quality in Northeastern St. Joseph County, Indiana: U.S. Geological Survey Water-Resources Investigations Report 95-4092, 50 p.
- Fowler, K.K., 1994, St. Joseph River Basin, in Fenelon, J.M., Bobay, K.E., and others, Hydrogeologic atlas of aquifers in Indiana: U.S. Geological Survey Water-Resources Investigations Report 92-4142, p. 25-34.
- Freeze, R.A., and Cherry, J.A., 1979, Groundwater: Englewood Cliffs, N.J., Prentice-Hall, Inc., 604 p.
- Heath, R.C., 1983, Basic ground-water hydrology: U.S. Geological Survey Water-Supply Paper 2220, 84 p.
- Helsel, D.R., and Hirsch, R.M., 1992, Statistical methods in water resources: New York, Elsevier, 522 p.
- Hem, J.D., 1985, Study and interpretation of the chemical characteristics of natural water (3d ed.): U.S. Geological Survey Water-Supply Paper 2254, 263 p.
- Michigan Area Council of Governments, 1991, Map of potential groundwater contamination sites, St. Joseph County, Indiana.
- Prudic, D.E., 1991, Estimates of hydraulic conductivity from aquifer-test analyses and specific-capacity data: Gulf Coast Regional Aquifer Systems, south-central United States: U.S. Geological Survey Water-Resources Investigations Report 90-4121, 38 p.
- Rutledge, A.T., 1993, Computer programs for describing the recession of ground-water discharge and for estimating mean ground-water recharge and discharge from streamflow records: U.S. Geological Survey Water-Resources Investigations Report 93-4121, 45 p.
- U.S. Environmental Protection Agency, 1996, Drinking water regulations and health advisories: Washington, D.C., U.S. Environmental Protection Agency, Office of Water, URL: <http://www.epa.gov/OST/Tools/dwstds9.html>

EXPLANATION

- 295 Unique site identifier
- △ Site with lithologic information
- Site with water-quality information
- | Site with geohydrologic-characteristic information

